



SW3613CX WET TYPE ON-OFF SOLENOID

UNIT: $\frac{\text{mm}}{\text{inch}}$

SHOWN ENERGIZED



WEIGHT : 400g

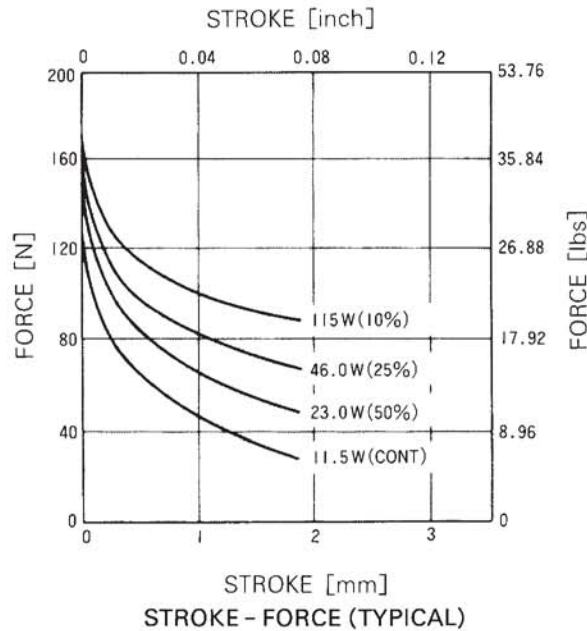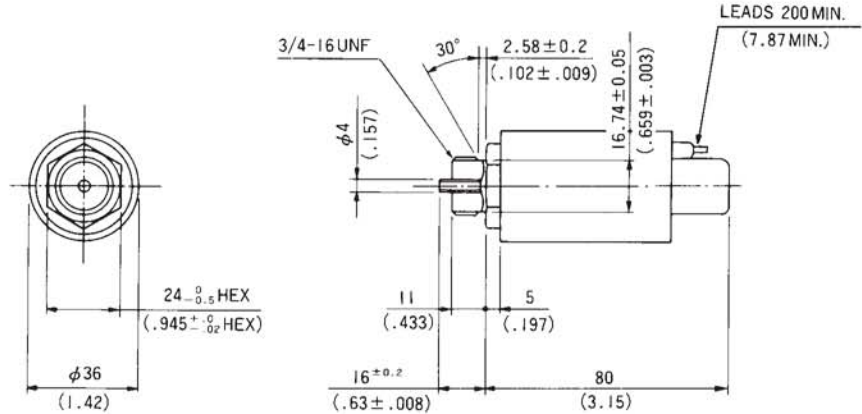

SPECIFICATIONS

| ITEM | UNIT | TYPE NO. SW3613CX-24 |
|-----------------------|-----------|------------------------------------|
| Volts DC | V | 24 |
| Current | A | 0.48 at cont. DUTY CYCLE |
| Resistance | Ω | 50 at 20°C |
| Watts | W | 11.5 at 20°C |
| Force | N//lbs | 44.2//9.9 at 1mm/0.04in: cont. |
| Full Stroke | mm (inch) | MIN. 1.5 (.59) |
| Insulation Class | | F(155°C) |
| Rated Pressure | MPa//PSI | 3.5//500 |
| Burst Pressure | MPa//PSI | 10.3//1500 |
| Dielectric Strength | | AC 1000V, 1 minute |
| Insulation Resistance | | More than 100M Ω at DC 500V |

Exclusive US Dist - Bicon Electronics - 1-800-624-2766

Shindengen  America, Inc.